Drying oven

HUMi-DRY 900

+30...+150°C





Standard equipment:

- Full AISI 304 stainless steel exterior
- AISI 304 stainless steel interior
- 2 controllers
- 4 swivel casters, 2 of which have brakes
- Adjustable pressure bulkhead for optimum drying process
- CE marking
- Mechanical espagnolette door lock
- Protection class 2.0 according to DIN 12880
- Electronic temperature controller with digital display with the possibility of changing the temperature setting every 0.1k
- ECO mode when humidity SP is achieved
- 6 stainless steel shelves


Optional equipment:

- ATEX Safety
- Power failure alarm
- Temperature sensor
- Changing the standard temperature range
- Access port
- 150 mm drawer
- Additional stainless steel shelves (shelves or stainless steel wire)
- LED lighting

APOLLO
Laboratory Technology

HUMi-DRY 900

- Uniform temperature
- Electric heating
- Ventilated airflow
- 4 swivel casters, 2 of which have brakes
- Optimal drying
- Customisation possible
- Eco mode

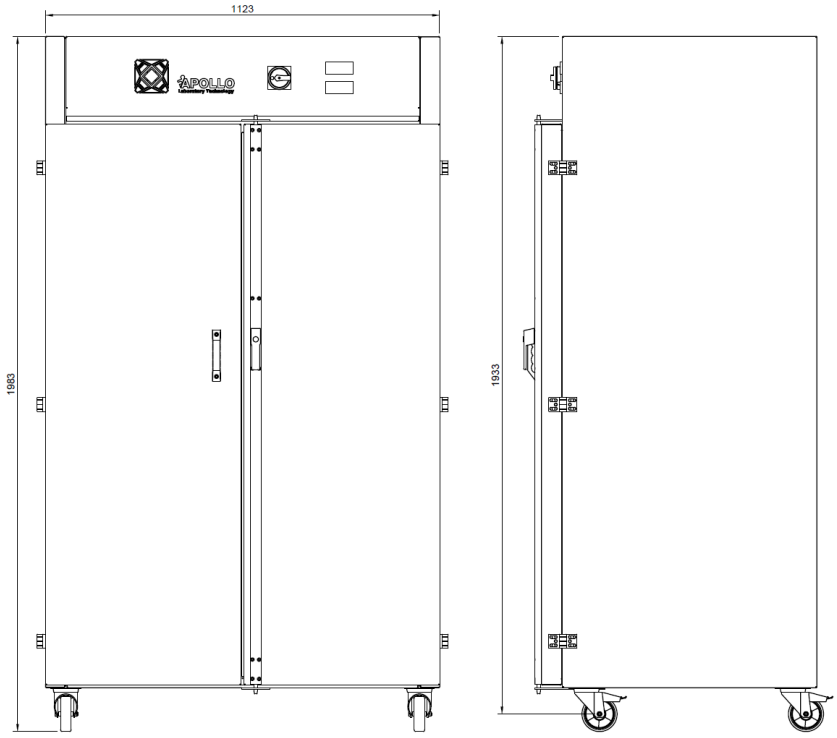

Technical specifications:

	Width	Depth	Height
External dimensions [mm]	1185	838	1983
Internal dimensions [mm]	1038	603	1420
Type of heating	Electric		
Type of ventilation	Compressed		
Gross capacity	888 [liters]		
Net capacity	854 [liters]		
Weight	280 [kg]		
Max. load	300 [kg]		
Number of shelves	Max. 19		
Number of guides / horizontal supports	19		
Max. shelf load	50 [kg]		
Temperature range	+5 above ambient temp. ...+150 [°C].		
Power	400/50 [V/hz]		
Number of external doors	2		
Power rating	User-dependent		
Rated current	3500/6500/9500 [W]		

APOLLO Laboratory Technology