Drying oven

# INo-DRY 500

+30...+150°C







## Standard equipment:

- Full AISI 304 stainless steel exterior
- AISI 304 stainless steel interior
- 1 controller
- 4 swivel casters, 2 of which have brakes
- Adjustable pressure bulkhead for optimal drying process
- CE marking
- Mechanical espagnolette door lock
- Protection class 2.0 according to DIN 12880
- Electronic temperature controller with digital display with the possibility of changing the temperature setting every 0.1k
- 6 stainless steel shelves


## Optional equipment:

- ATEX Safety
- Power failure alarm
- Temperature sensor
- Changing the standard temperature range
- Access port
- 150 mm drawer
- Additional stainless steel shelves (shelves or stainless steel wire)
- LED lighting

APOLLO
Laboratory Technology

# INo-DRY 500

- Uniform temperature
- Electric heating
- Ventilated airflow
- 4 swivel casters, 2 of which have brakes
- Optimal drying
- Customisation possible

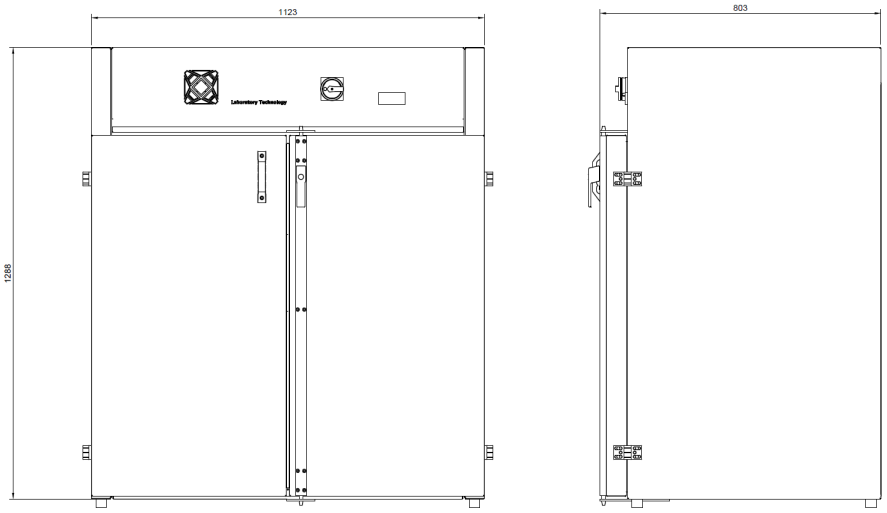


**Technical specifications:**

| | Width | Depth | Height |
|---|---|---|---|
| External dimensions [mm] | 1110 | 796 | 1342 |
| Internal dimensions [mm] | 953 | 573 | 807 |
| Type of heating | Electric | | |
| Type of ventilation | Compressed | | |
| Gross capacity | 440 [liters] | | |
| Net capacity | 423 [liters] | | |
| Weight | 215 [kg] | | |
| Max. load | 300 [kg] | | |
| Number of shelves | Max. 11 | | |
| Number of guides / horizontal supports | 11 | | |
| Max. shelf load | 30 [kg] | | |
| Temperature range | +5 above ambient temp. ...+150 [°C]. | | |
| Power | 400/50 [V/hz] | | |
| Number of external doors | 2 | | |
| Power rating | User-dependent | | |
| Rated current | 3500/6500 [W] | | |

APOLLO
Laboratory Technology