Freezer

SLTM 100

-10...-30°C





Standard equipment:

- RAL 9016 coated exterior
- Interior made of AISI 304 acid-resistant steel
- 70 mm insulation
- Environmentally friendly refrigerant
- Solid door with double replaceable seal
- Mechanical door lock
- Automatic door closing system
- Right door handle
- Electronic temperature controller with digital display with the possibility of changing the temperature setting every 0.1k
- Visual and audible high and low temperature alarms
- Open door alarm
- Dirty condenser coil alarm
- Faulty temperature sensor alarm
- External alarm output potential-free contact
- Auto defrost and condensation evaporation
- Shelf guides / horizontal supports
- 2 coated wire shelves
- Adjustable shelf position
- Access port Ø10mm
- Adjustable feet

Optional equipment:


- Alarm backup battery
- Power failure alarm
- Temperature sensor
- Change of standard temperature range
- Additional access port in the wall Ø10mm
- Glycol container
- 4 swivel casters, 2 of which have brakes
- Additional shelf guides / horizontal supports
- Additional shelves (coated wire, stainless steel wire)
- Left door handle
- LED lighting
- External housing made of acid-resistant AISI 304 steel

APOLLO
Laboratory Technology

SLTM 100

Environmentally friendly refrigerant

Access port Ø10mm

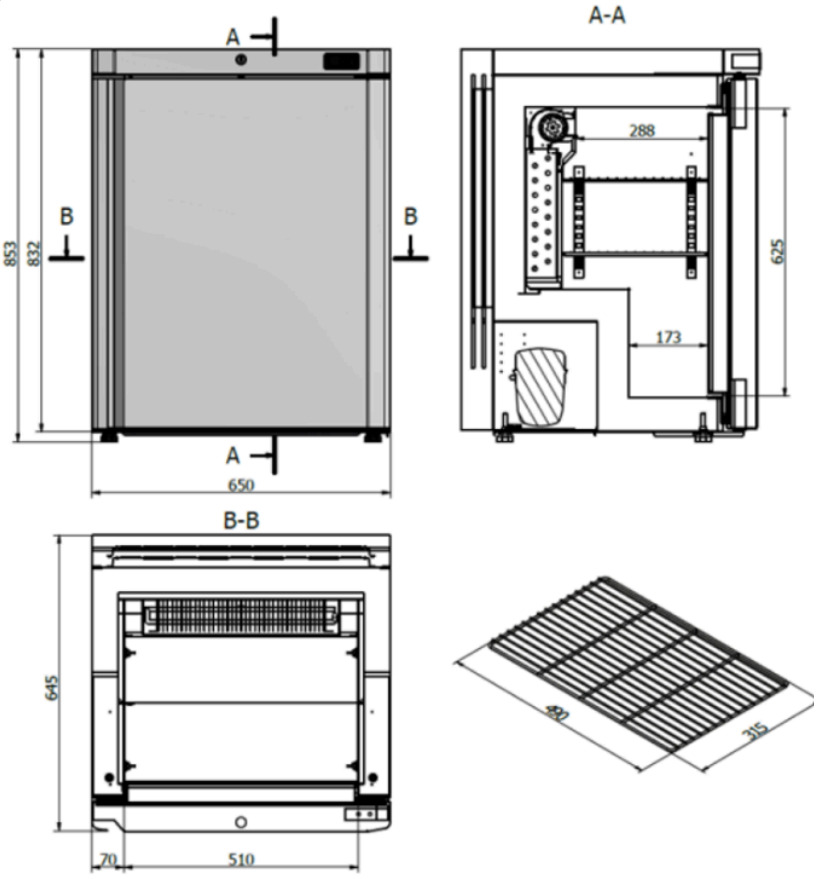

Technical specifications:

	Width	Depth	Height
External dimensions [mm]	650	645	853
Internal dimensions [mm]	510	288/173	625
Cooling unit type	Internal		
Cooling type	Dynamic		
Gross capacity (chamber 1)	85 [liters]		
Net capacity (chamber 1)	80 [liters]		
Weight	90 [kg]		
Max. load	60 [kg]		
Number of shelves	2		
Number of guides / horizontal supports	4		
Max. shelf load	25 [kg]		
Temperature range	-10... -30 [°C]		
Ambient conditions	+25 [°C] at 60% HR		
Refrigerant	R290		
Power	230/50 [V/Hz]		
Number of doors	1		
Daily energy consumption	8.9 [kWh/24h]		
Noise level	51 [db]		
Power rating	800 [W]		
Rated current	3.4 [A]		

APOLLO
Laboratory Technology